




Electric Pottery Kilns

KILNS Model	Internal mm			External mm			Power kw	Plug/ amp
	W	D	H	W	D	H		
C10	225	225	225	450	485	510	2.4	3\10
P14	330	330	330	750	540	580	3.6	3\15
C14	330	330	330	750	540	580	2.4	3\10
P27	380	380	460	950	775	795	4.8	3\20
C27	380	380	460	950	775	795	3.6	3\15
P52	490	490	610	1060	985	1620	9.3	5\20
P80	610	610	610	1180	1060	1615	10.8	5\20
P90	610	610	760	1180	1060	1780	13.7	5\20
P100	610	610	835	1180	1060	1780	15.4	5\32
P120	610	610	910	1200	1060	1780	16.8	5\32
P160	850	850	1200	1500	1460	2200	22	5\40

Detail	Standard	Options
Shell	PGI	Stainless Steel
Thermocouples	Type K or R	
Roof Style	Flat	Ached
Door hinge	LHS or RHS	Vertical
Over Temperature Protection	No	Thermal fuse or Control TC
Control	Shut Down	TAIE/HARCO

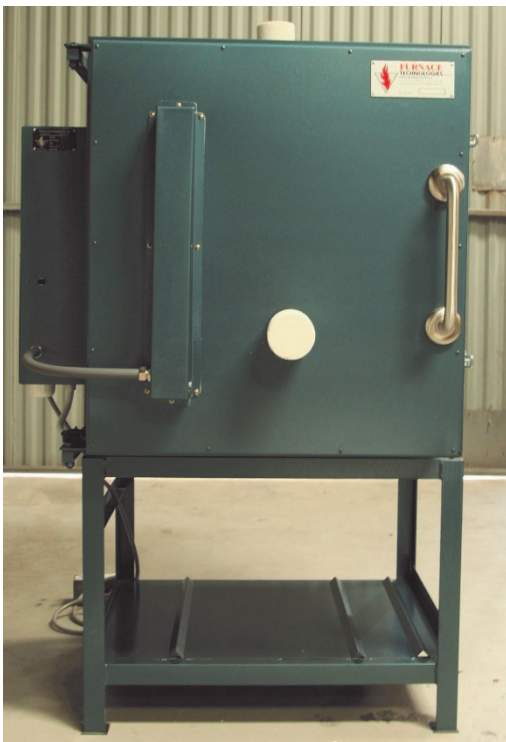

P52 (with lower shelf-custom)



P120 (with arched roof option)